

Dimensions & Specifications

Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Cu. Ft.	Shipping Weight	Cord Attached
CDBC15 (3 lower)	28800.0100	120	15	1425	1800	4.5 gal./hr.	6.3	31 lbs. (14.1 kg)	Yes
CDBC15 (2 top)	28800.0101	120	15	1425	1800	4.5 gal./hr.	4.0	27 lbs. (12.3 kg)	Yes
CDBC35 (3 lower) ^{1b}	28800.0113	120/240	16.7	3500	3850	8.5 gal./hr.	6.3	32 lbs. (14.6 kg)	No
CDBC35 (2 top)	28800.0107	120/240	16.7	3500	3850	8.5 gal./hr.	3.7	26 lbs. (11.8 kg)	No
CDBC35 (3 lower) ^{1b}	28800.0114	120/240	16.7	3500	3850	8.5 gal./hr.	6.3	32 lbs. (14.6 kg)	No
CDBC35 (2 top) ^{1b}	28800.0115	120/240	16.7	3500	3850	8.5 gal./hr.	3.7	27 lbs. (12.3 kg)	No


¹Models have a stainless steel funnel. ^{1b}Model has lower warmers on the left side of brewer and has no hot water faucet. ²Model has black decor.

Electrical: 120 volt, 15 amp. models require 2-wires plus ground service rated 120V, single phase, 60 Hz.

120/240 volt models require 3-wires plus ground service rated 120/240V, single phase, 60 Hz.

An internal terminal block is configured for connection to a 3-wire plus ground.

Plumbing: 20-90 psi (138-621 kPa). Machines supplied with 1/4" male flare fitting. Twin models supplied with 3/8" male flare fitting.

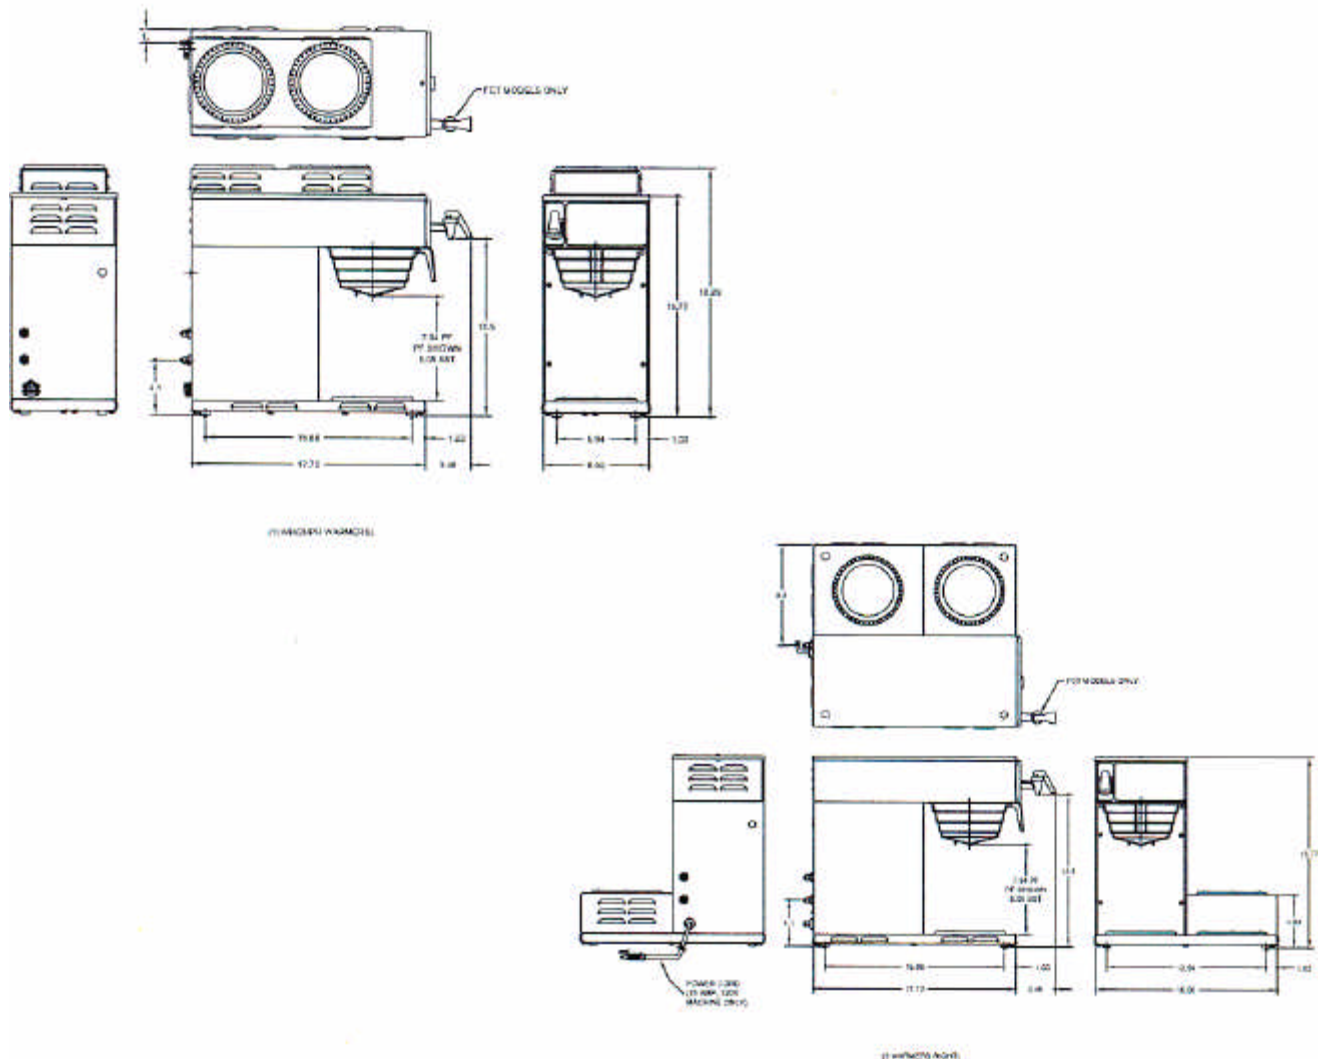

All dimensions shown in inches. Bunn®/Mita Corporation uses all care/effort relative to materials in this publication. Please contact Bunn®/Mita to request dimensions for individual models. BUNN®/MITA